

# GTO®/ACCESS SYSTEMS

## COMMERCIAL/RESIDENTIAL

Technology • Innovation • Quality  
Since 1987




### WIRELESS VEHICLE SENSOR (R4500)

Automatically activates gate operator  
“Hands-Free” when a vehicle exits the  
property. Easy installation, no trenching  
required.



**Dimensions:**  
1.75" (4.5 cm) diameter  
16.75" (42.5 cm) long.

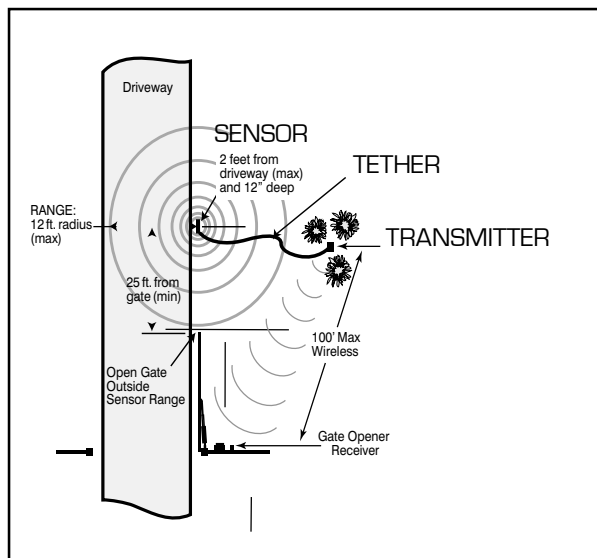

AVAILABLE FROM:

### STANDARD FEATURES

- Electromagnetic sensor detects vehicles in motion.
- Compatible with all automatic gate operators, or other systems requiring a dry contact input device.
- Relay latch time of 2 seconds. May not be used as a safety device.
- Internal potentiometer adjusts sensitivity from 3 to 12 ft. radius to accommodate many applications and situations.
- Designed for vehicular gate operators – optimized for gate control.
- Easy installation: two piece construction, sensing coil and electronics.
- Long battery life due to low power consumption.
- Easy activation for GTO-Gen3 Control Boards.
- Requires two “AA” Batteries (included).
- Designed to minimize line noise of 50Hz or 60Hz; improves detection capability near power lines and avoids crosstalk frequency issues.

### GTO Wireless Vehicle Sensor

Kit includes a wireless sensor wand with a plug-in electronic transmitter module. Transmitter has 15 ft. tether designed for mounting away from driveway edge. GTO’s RB709U-NB two channel receiver and two “AA” batteries are also included. The range between transmitter and receiver is up to 100 ft.

1-800-543-GATE (4283) • WWW.GTOACCESS.COM

GTO®, GTO/PRO®, Bulldog®, GTO Access Systems™, are trademarks of GTO, Inc. and are the exclusive property of GTO, Inc. (“GTO”). All rights are reserved by GTO, and these marks may not be used in any form without the prior written permission of GTO. © 2009